



通膨促銷專案 Limited Offer

突波保護器 · 電容器 · 電避雷針 · 雷擊預警器等

SPD, Power Capacitors, Lightning Arresters, etc.

Low-Voltage Surge Protection Devices






Model	Specifications	Photo
OBO SPD	C25-B+C/NPE	 <p>Figure 1</p> <p>Unit Price Dimensions</p>
	V20-C/0 130V (1P)	
	V20-C/0 230V (280V) (1P)	
	V20-C/0 500V (1P)	
	V25-B/0 230V (280V) (1P)	
	V25-B+C/0 230V (280V)	
WII SPD	WSP-B/0 280V	 <p>Figure 2</p> <p>Unit Price Dimensions</p>
	WSP-B+C 150V	
	WSP-B+C 280V (Single Module)	
	WSP-B+C 280V (Single Module)	
	WSP-B+C 385V (Single Module)	
	WSP-C/0 150V	
	WSP-C/0 150V	
	WSP-C/0 280V	
	WSP-C/0 385V	
	WSP-C/U-2+FS (Monitoring Module)	
	WSP-C/U-3+FS (Monitoring Module)	
	WSP-C/U-4+FS	
	WSP-C/U-1	
	WSP-C/U-1	
	WSP-C/U-2+AS	
	WSP-C/U-3-AS	
WSP-NPE 255V (Single Module)		
WSP-NPE 255V (Single Module)		

Low-Voltage Power Capacitors

Low-Voltage Power Capacitors	260V 20kVAR-WII	 <p>Figure 3</p> <p>Unit Price Dimensions</p>
	260V 5kVAR -WII	
	260V 10kVAR-WII	
	260V 15kVAR-WII	
	260V 25kVAR-60Hz-WII	
	260V 30kVAR-60Hz-WII	
	400V 10kVAR-60Hz-WII	
	420V 15kVAR-WII	
	440V 5kVAR-60Hz-WII	
	440V 15kVAR-WII	

Low-Voltage Power Capacitors	440V 25kVAR-WII	 Figure 3 Unit Price Dimensions
	440V 30kVAR-60Hz-WII	
	480V 7kVAR-WII	
	480V 10kVAR-WII	
	480V 15kVAR-WII	
	480V 20kVAR-WII	
	525V 5kVAR-60Hz-WII	
	525V 10kVAR-WII	
	525V 15kVAR-WII	
	525V 20kVAR-WII	
	525V 25kVAR-WII	
	525V 30kVAR-WII	

Lightning Arrester / Rod

Manufacturer	Model / Specifications	Photo
ATSA	ATSA DAT CONTROLER [®] PLUS 15 (includes tip)	 Figure 4 Unit Price Dimensions
	DAT CONTROLER [®] PLUS 30	
	DAT CONTROLER [®] PLUS 45 (includes tip)	
HELITA	CCF-4045 LIGHTNING FLASH COUNTER Dimensions: 80 x 120 x 170 mm	 Figure 5 Unit Price Dimensions
WII	Support Rod ø26.6*ø30*980L SUS 304	 Figure 6 Unit Price Dimensions
WII	200A~100KA 4/10μS LIGHTNING FLASH COUNTER	 Figure 7 Unit Price Dimensions
WII	WII-EOS-33RM-50/60Hz-300/5A- 15VA/1.0-PRCEK0300-15401 (for WLFC-21)	 Figure 8 Unit Price Dimensions

Low-Voltage Surge Protection Device

Model	Specifications	Unit Price (NT\$)	Note
OBO SPD	C25-B+C/NPE	800	Photo Dimensions
	V20-C/O 130V (1P)	560	
	V20-C/O 230V (280V) (1P)	560	
	V20-C/O 500V (1P)	800	
	V25-B/O 230V (280V) (1P)	800	
	V25-B+C/O 230V (280V)	800	
WII SPD	WSP-B/O 280V	480	Photo Dimensions
	WSP-B+C 150V	640	
	WSP-B+C 280V (Single Module)	640	
	WSP-B+C 280V (Single Module)	640	
	WSP-B+C 385V (Single Module)	640	
	WSP-C/O 150V	480	
	WSP-C/O 150V	480	
	WSP-C/O 280V	480	
	WSP-C/O 385V	480	
	WSP-C/U-2+FS (Monitoring Module)	800	
	WSP-C/U-3+FS (Monitoring Module)	800	
	WSP-C/U-4+FS	800	
	WSP-C/U-1	160	
	WSP-C/U-1	160	
	WSP-C/U-2+AS	960	
	WSP-C/U-3-AS	960	
WSP-NPE 255V (Single Module)	640		
WSP-NPE 255V (Single Module)	640		

Low-Voltage Power Capacitors

Low-Voltage Power Capacitors	260V 20kVAR-WII	1,440	Photo Dimensions
	260V 5kVAR -WII	720	
	260V 10kVAR-WII	880	
	260V 15kVAR-WII	1,360	
	260V 25kVAR-60Hz-WII	2,400	
	260V 30kVAR-60Hz-WII	2,560	
	400V 10kVAR-60Hz-WII	720	
	420V 15kVAR-WII	1,040	
	440V 5kVAR-60Hz-WII	640	
	440V 15kVAR-WII	1,040	

Low-Voltage Power Capacitors	440V 25kVAR-WII	1,440	Photo Dimensions
	440V 30kVAR-60Hz-WII	1,600	
	480V 7kVAR-WII	960	
	480V 10kVAR-WII	720	
	480V 15kVAR-WII	1,040	
	480V 20kVAR-WII	1,360	
	525V 5kVAR-60Hz-WII	640	
	525V 10kVAR-WII	720	
	525V 15kVAR-WII	1,040	
	525V 20kVAR-WII	1,360	
	525V 25kVAR-WII	1,440	
	525V 30kVAR-WII	1,600	

Lightning Arrester / Rod

Manufacturing Plant	Model / Specification	Unit Price (NT\$)	Note
ATSA	ATSA DAT CONTROLER [®] PLUS 15 (includes tip)	19,200	Photo Dimensions
	DAT CONTROLER [®] PLUS 30	24,000	
	DAT CONTROLER [®] PLUS 45 (includes tip)	33,600	
HELITA	CCF-4045 LIGHTNING FLASH COUNTER Dimensions: 80 x 120 x 170 mm	-	Photo Dimensions
WII	Support Rod ø26.6*ø30*980L SUS 304	-	Photo Dimensions
WII	200A~100KA 4/10μS LIGHTNING FLASH COUNTER	-	Photo Dimensions
WII	WII-EOS-33RM-50/60Hz-300/5A- 15VA/1.0-PRCEK0300-15401 (for WLFC-21)	-	Photo Dimensions

(Unit: mm)

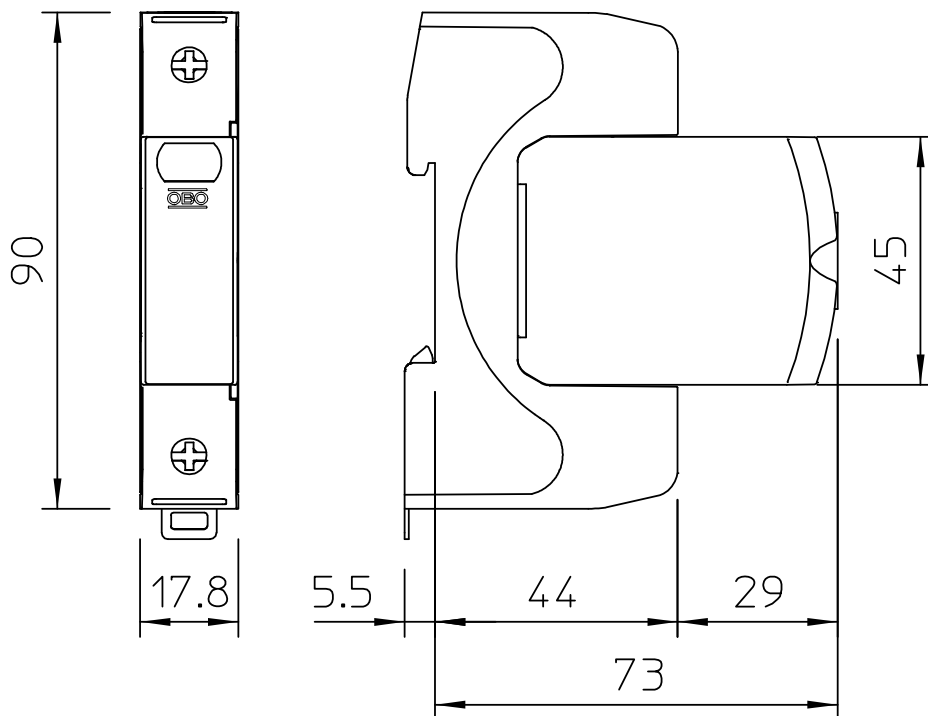

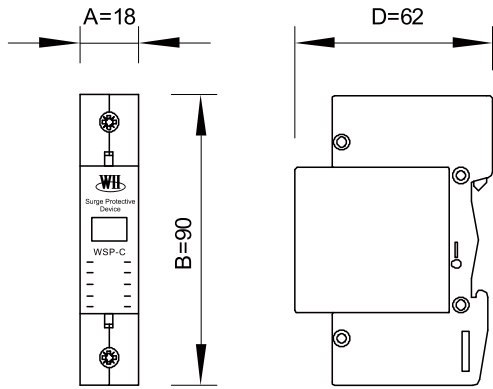



PHOTO	MODEL	
Figure 1	OBO SPD Series	

[Photo](#) [Unit Price](#)


(Unit: mm)



B+C、C、FS、AS、NPE Single Module

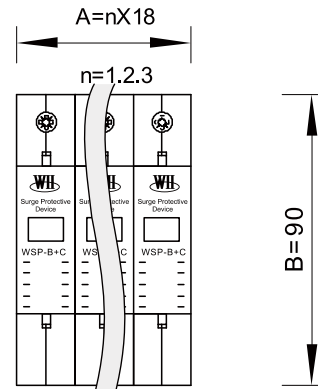

Modular Surge Protection Devices

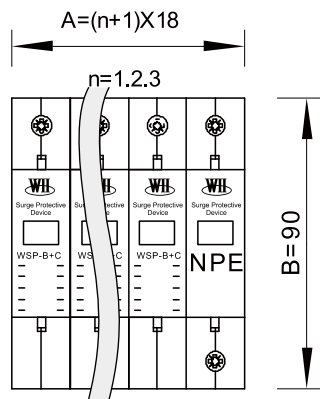

Modular Surge Protection Devices With Monitors



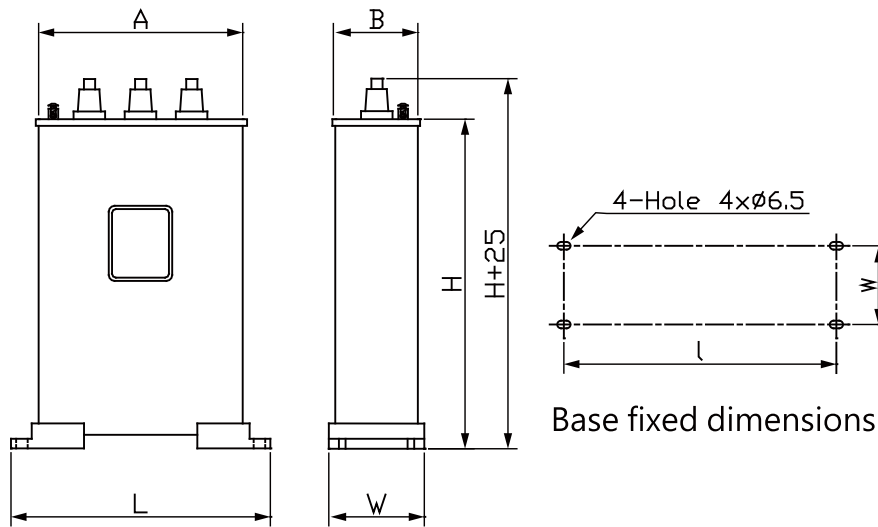


PHOTO	MODEL	
Figure 2	WII SPD Series	

[Photo](#)

[Unit Price](#)

(Unit: mm)

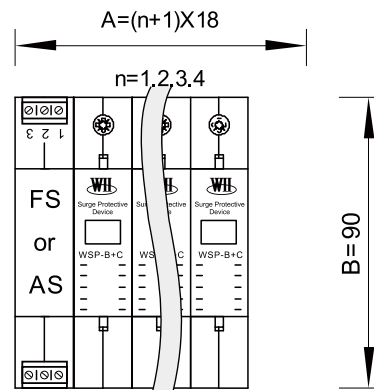

Base fixed dimensions

Model	Voltage (V)	Capacity (KVAR)	Base fixed dim. L x W (l x w)	Dimensions (A x B x H) mm
WSC 2005	260	5	226 x 80 (206 x 54)	178 x 70 x 165
WSC 2010		10		178 x 70 x 165
WSC 2015		15		178 x 70 x 280
WSC 2020		20	293 x 135 (275 x 108)	240 x 125 x 245
WSC 2025		25	240 x 125 x 300	
WSC 2030		30	240 x 125 x 300	
WSC 4005	440	5	226 x 80 (206 x 54)	178 x 70 x 165
WSC 4010		10		178 x 70 x 165
WSC 4015		15		178 x 70 x 220
WSC 4020		20	178 x 70 x 260	
WSC 4025		25	178 x 70 x 280	
WSC 4030		30	293 x 135 (275 x 108)	240 x 125 x 220
WSC 5005	525	5	226 x 80 (206 x 54)	178 x 70 x 165
WSC 5010		10		178 x 70 x 165
WSC 5015		15		178 x 70 x 220
WSC 5020		20	178 x 70 x 260	
WSC 5025		25	178 x 70 x 280	
WSC 5030		30	293 x 135 (275 x 108)	240 x 125 x 220


PHOTO	MODEL	
Figure 3	Low-Voltage SC Series	

[Photo 1](#) [Unit Price 1](#)


[Photo 2](#) [Unit Price 2](#)

(Unit: mm)

Dimensions
避雷針尺寸圖

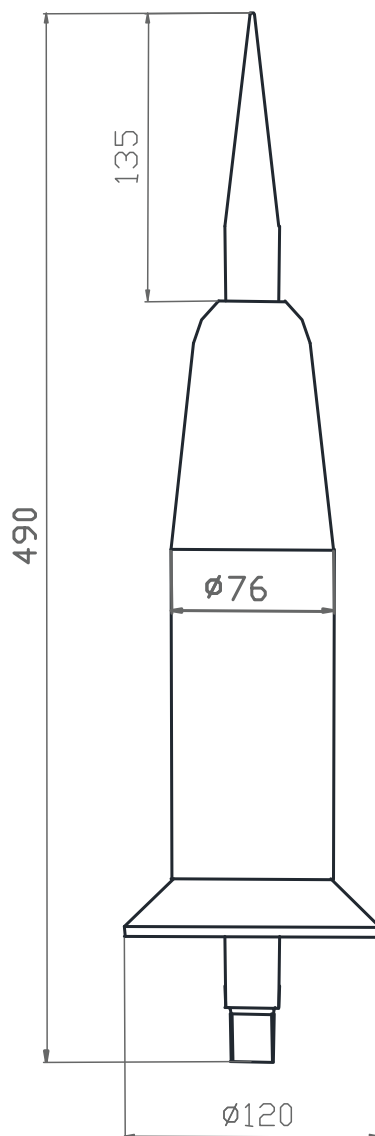

manufactured in stainless steel AISI 316
(材質：SUS 316 不鏽鋼)

PHOTO	MODEL	
Figure 4	ATSA Lightning Arrester	

[Photo](#) [Unit Price](#)

(Unit: mm)

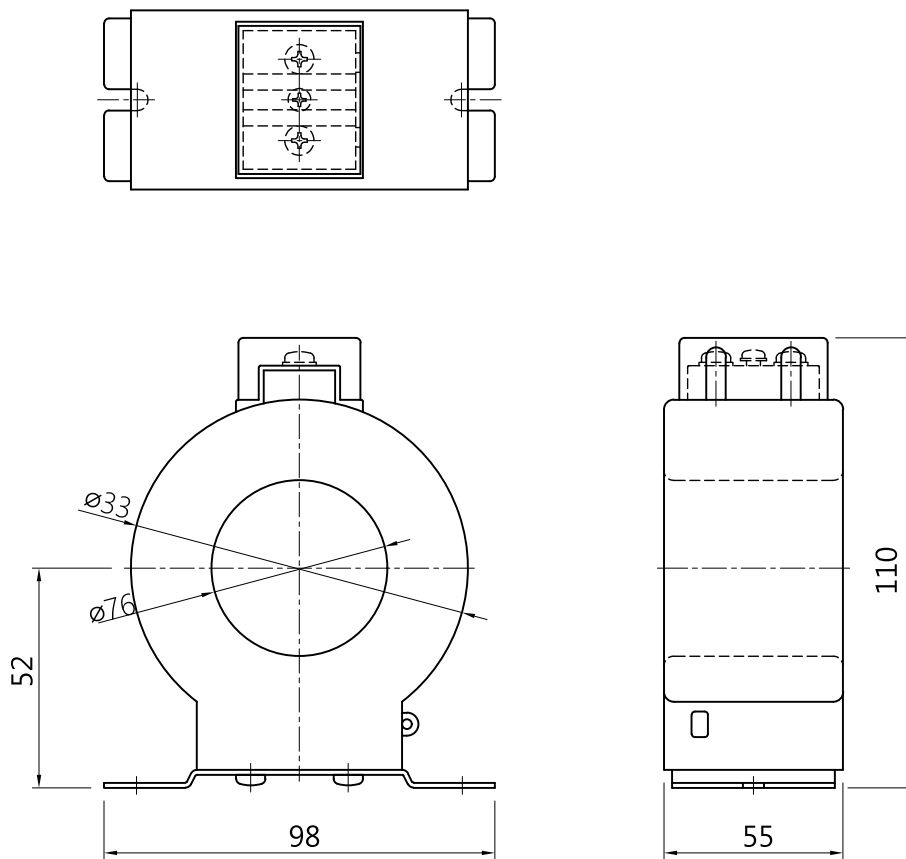



PHOTO	MODEL	
Figure 8	WII EOS-33RM	

[Photo](#) [Unit Price](#)